

**Locks and latches for doors
Methods and testing**

19091-2000

39

91.190, 4909

1. () .
 2. () 17 2000 .
 3. 19091-82, 23306-87.
 4. 1 2001 .
10 2001 . N 3.
1. (-)
 2. () .
- 5089-97.
15150-69.

3.

3.1. , ()

3.2.
18321.

4.

4.1.

4.2.

60

120
30 / (286 /);
5 - 8 / ;

4.3.

+/- 5%.

4.4.

+/- 5%.

4.5.

5.

5.1.

5.2.

5.3.

+/- 0,2

6.

6.1.

6.2.

6.3.

6.3.1.

5089.

15150.

6.3.2.

1.

(,)	(<*>;); <*>; <*>; (); <*>
(),	; (); - ; ; ; ();
(, -)	; (-)); ; ; ;


	(720°)
<*>	

6.3.3.
1

1)

15

+/- 45° (1.

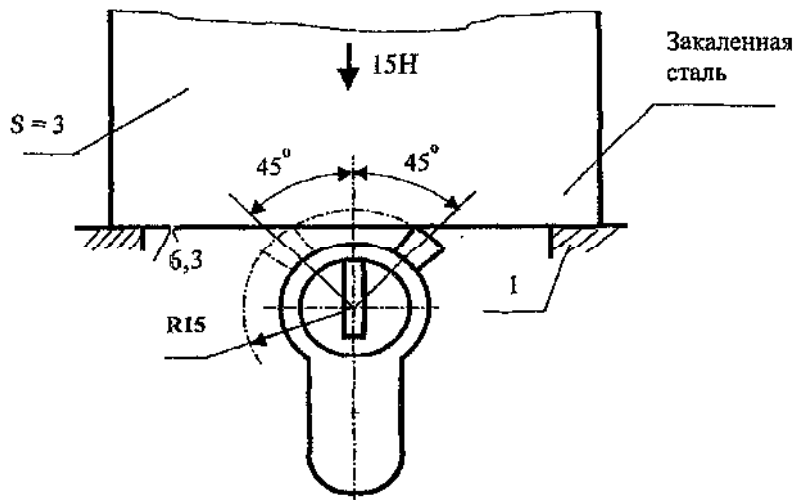

1.

6.3.4.

()

6.3.5.

30 - 35%



6.4.

6.4.1.


P_1, P_2, P_3

M_1, M_2


2 - 5.

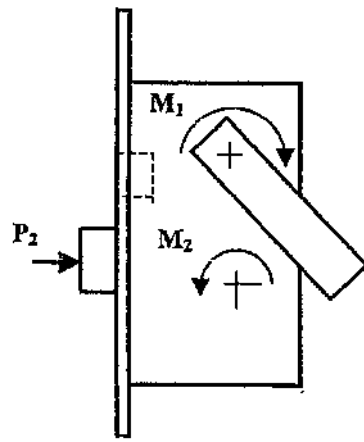


2. P_1, P_2 M_1, M_2

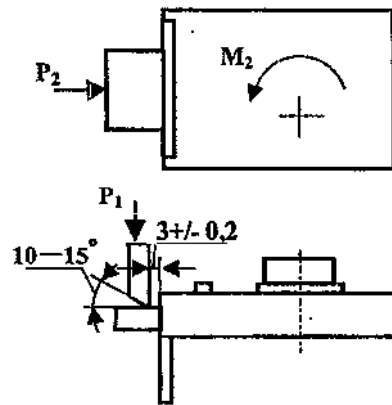

3. P_1, P_2 M_2

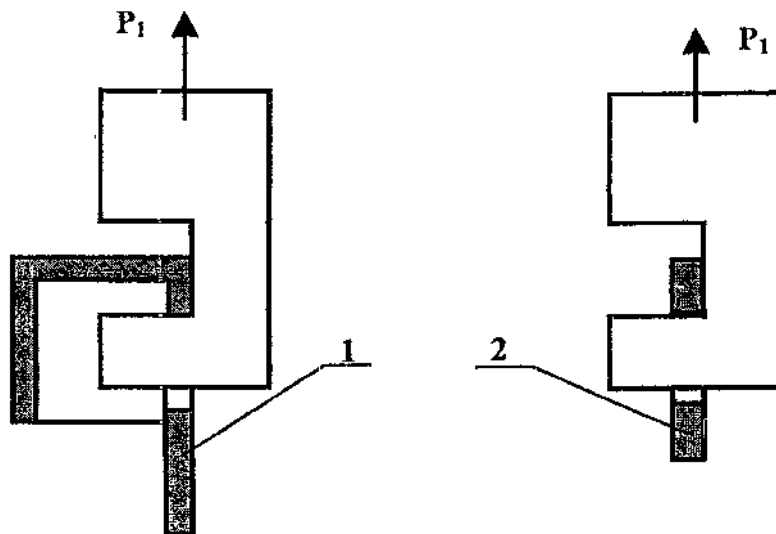

4. P_1 (1) (2)

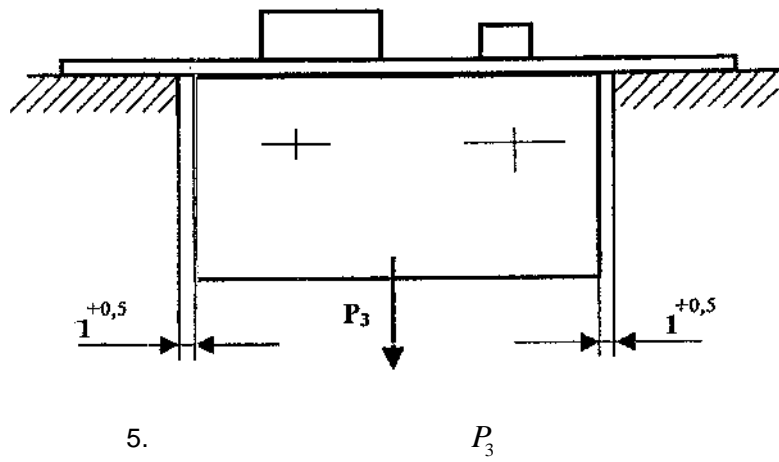

6.4.2.
6.4.2.1. , (. 2,
3) P_1 , , 5089 1- ,
1 , 5089 2- , 1
, 5089 3- 4- ,
1 ,

6.4.2.2. (. 4) P_1
5089 1- 1 .
6.4.2.1.
4 - 6

6.4.2.3. (.
2, 3), P_2 , , 5089 1- ,
1 . 6.4.2.1.

6.4.2.4. (.
) (. 5) P_3 ,
5089 1- , 1 .

6.4.2.1.
6.4.2.5. () 5089


6.4.3. 6.4.2
 P_1, P_2, P_3 , , ,
 M_1, M_2 , 5089.

6.4.4. (-), 5089, 1 .

6.4.5. M_2 ,
5089, 1 .


6.4.6. , , ,
(-) .

6.5.
6.5.1. P_4, P_5, P_6 M_3 ,
 M_4 , 6 - 8.

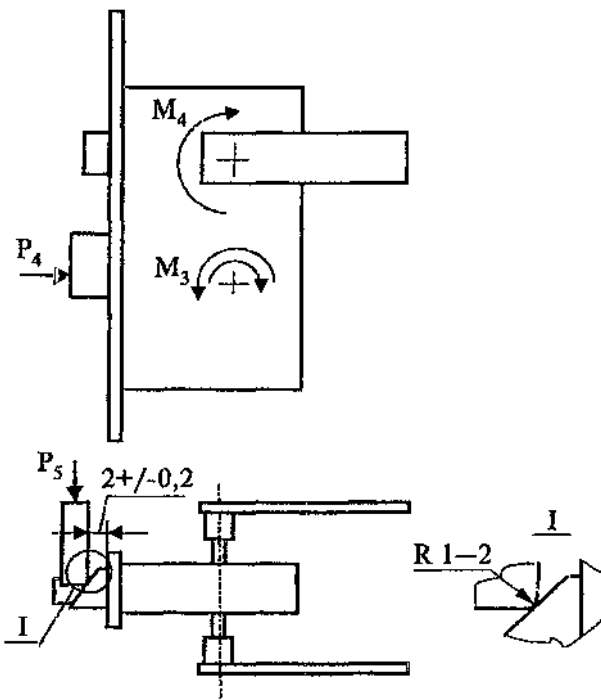


6. P_4

P_5 ; M_3, M_4

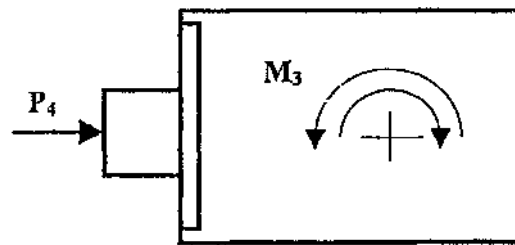

7. P_4
 M_3 ()

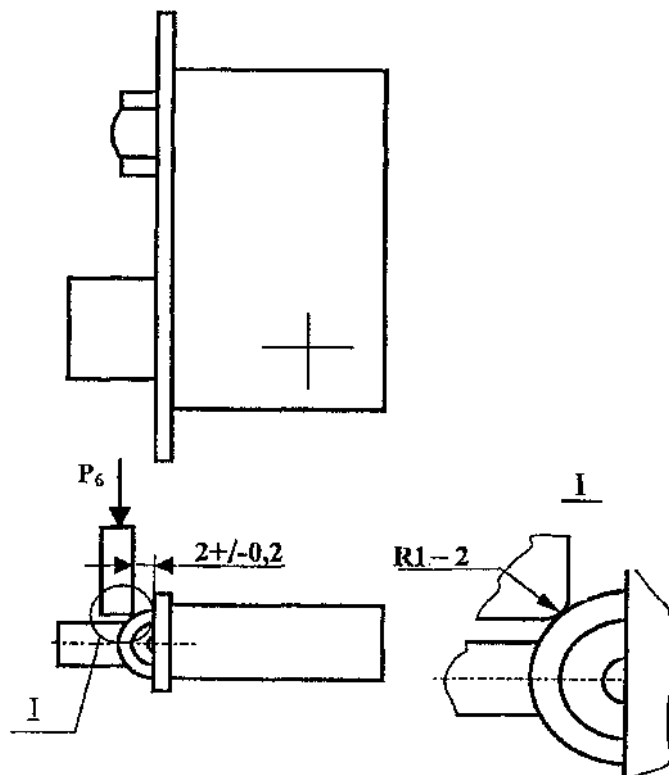

8. () P_6 ,

5089.

7), 6.5.2. P_4 (. 6,

6.5.3. P_5 (. 6)

8), 6.5.4. P_6 (. 5.3.

P_6 .

6.5.5. () M_3 (. 6, 7)

6.5.6. (-) M_4 (. 6)

M_4 .

6.5.7. 6.5.3 - 6.5.6

7.

7.1. (), (), ;

;

;

;

;

;

;

,

,

()

. . () ;
. . " " ;
. . ;
. . ;
. . , .