

Wood doors. Method of testing for the resistance to impact load in the direction of opening

26892-86

39

53 6101

1 1987

: . . . (' -), . . . ,

() ,

1.

1.1.

1.2.

(5,0 +/- 0,1) , - (200 +/- 5)

1.3.

+/- 0,1

1000

427-75

1.4.

400

8026-75

882-75

+/- 0,1

1.5.

3749-77.

2.

2.1.

()

2.2.

2.3.

4182-83

4181-83 -

2.4.

1000

(

2.5.


100

1/3

300

(.).

250

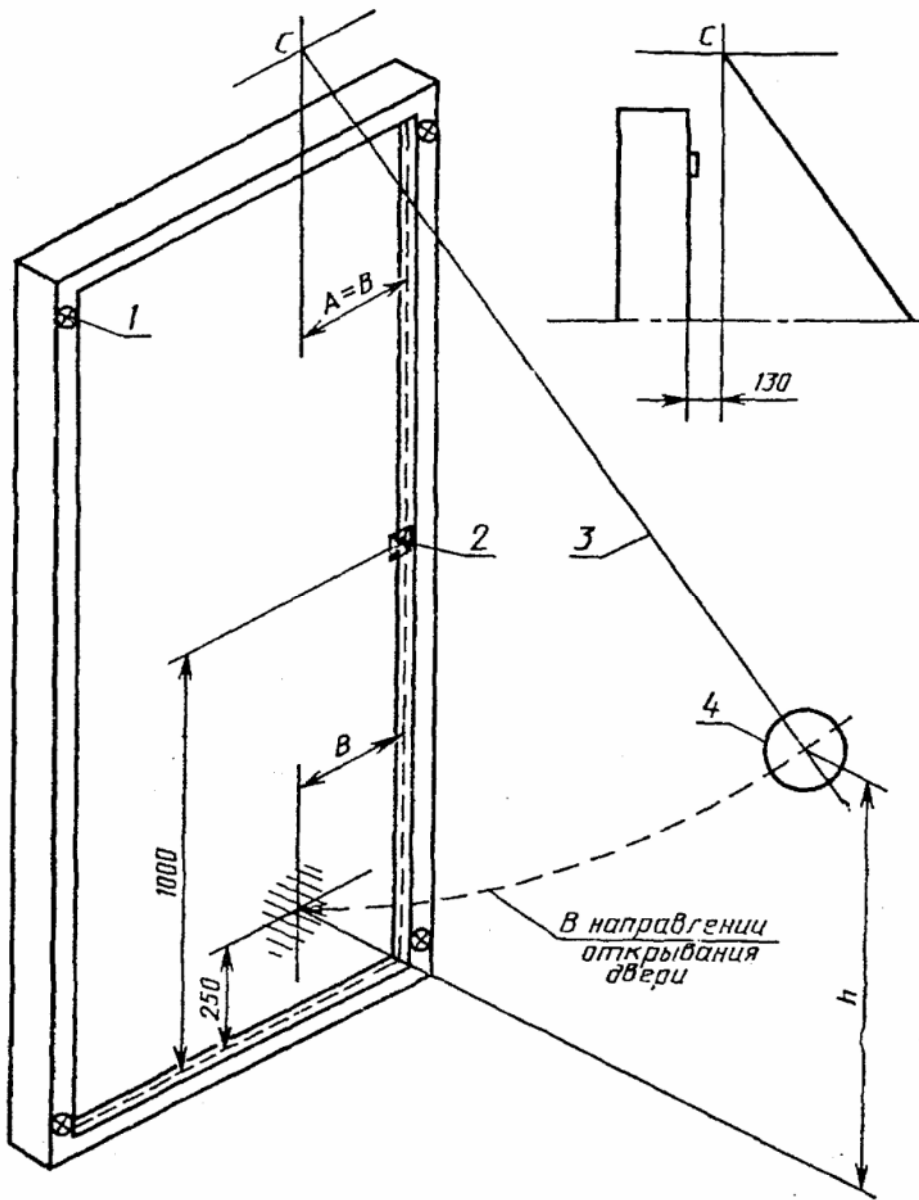

1 - ; 2 - ;
 3 - ; 4 - ()
 = 1/3 , 300

2.6. h, , (.),

$$h = \frac{E}{mg} \cdot 1000,$$

m -
 g - 9,8 / 2.

2.7.
 h

2.8. (.)

30	10
60	20
60	30

2.9.

()

2.10.

. 2.8 2.9

. 2.8

(. . 2.3),

2.11.

2.12.

2.13.

2.14.

),

. 1.1 - 1.5;
. 2.1 - 2.9;
. 2.10 - 2.13;

;

;

;

,

,